


**CeraWall Select.** The luxury of a solid stainless steel shower channel, finished the way you want it.



CeraWall Select, shown in matt PVD-coated brass

# CeraWall Select

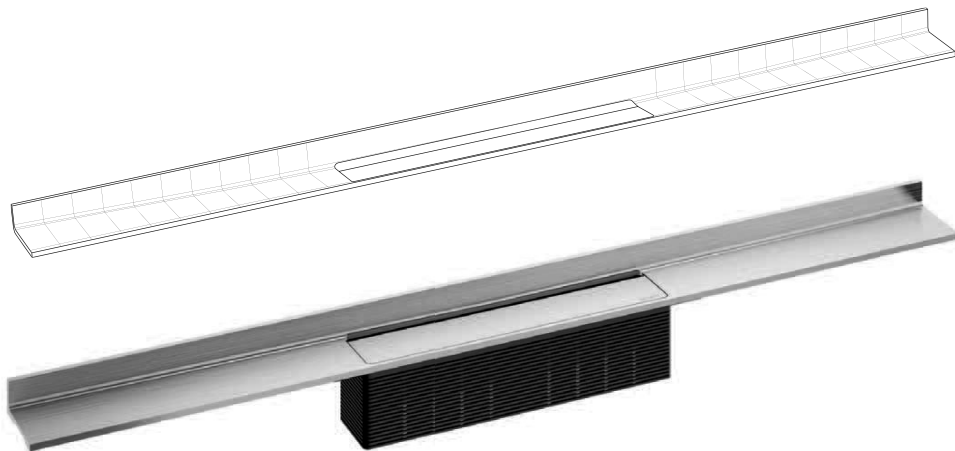


## CeraWall Select brings out the design of the bathroom

CeraWall Select visually accentuates the integrated drainage in level-access showers. Nothing is hidden away; even the functionality is emphasised through the use of high-quality materials. The shower area is defined by a sharp edge which also creates a visual link to the wall. Water is drained away reliably via an integral cross slope.

<b>65 mm 90 mm</b> Installation height	 Very simple cleaning	 Lengths can be adjusted	 Position in the Shower	 No sloped side sections
---	--------------------------	-----------------------------	----------------------------	-----------------------------

Finish options		Polished stainless steel	
Satin stainless steel			
PVD-coated, anthracite, matt	PVD-coated, rose gold, matt	PVD-coated, brass, matt	

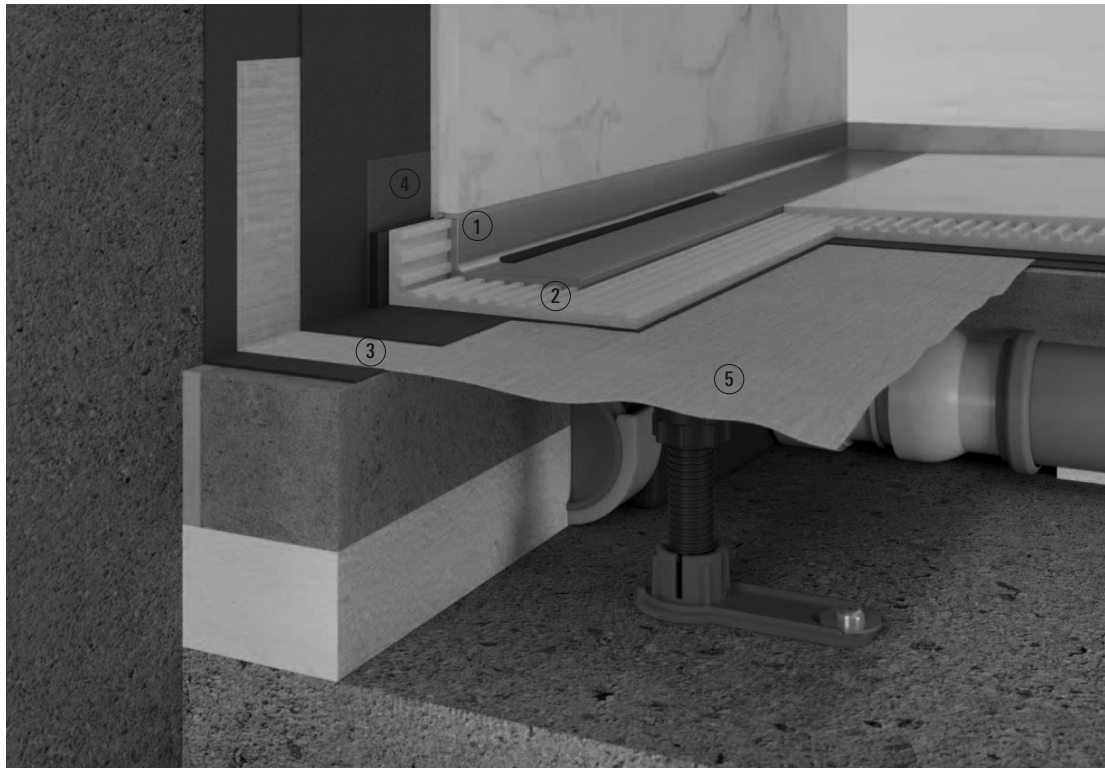

1. Solid 5mm stainless steel L-profile
2. Void-free laying in the adhesive bed
3. Bonded waterproofing
4. Self-adhesive safety tape S 3 with cut-resistant stainless steel mesh and sound insulation
5. DallFlex sealing sleeve



Our service for you:  
installation video

At [dallmer.de/en/videocenter/](http://dallmer.de/en/videocenter/), you will find a video which clearly shows just how easy it is to install CeraWall.

#### Technical information

Build-in heights with DallFlex drain body:

65 mm or 90 mm

Build-in heights with DallFlex shower underlay:

from 85 mm

Drainage rates: 0.54 l/s – 1.45 l/s\*

Suitable for floor finish of 10 – 24 mm and wall finish of 12 – 24 mm (including adhesive bed), (for CeraWall Select N 24 – 32 mm)

Lengths: 800 – 2000 mm

\* depending on the drain version and connection type

#### How to select:

CeraWall Select shower channel




DallFlex drain body



DallFlex Wall shower underlay

or



# Shower channel CeraWall Select

## DALLMER shower channel CeraWall Select satin stainless steel

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. With drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan suitable for floor finish of 10 – 24 mm and wall finish of 12 – 24 mm (including adhesive).


### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- construction and sealing adhesive
- temporary blanking plate with integral spirit level


### MATERIAL

1.4301 stainless steel, 5 mm solid, satin finished, load class K 3 (300 kg)


ITEM	LENGTH	PART NO.
shower channel CeraWall Select satin stainless steel	800 mm	535245
shower channel CeraWall Select satin stainless steel	900 mm	535146
shower channel CeraWall Select satin stainless steel	1000 mm	535153
shower channel CeraWall Select satin stainless steel	1100 mm	535160
shower channel CeraWall Select satin stainless steel	1200 mm	535177
shower channel CeraWall Select satin stainless steel	1300 mm	536457
shower channel CeraWall Select satin stainless steel	1400 mm	536464
shower channel CeraWall Select satin stainless steel	1500 mm	536471

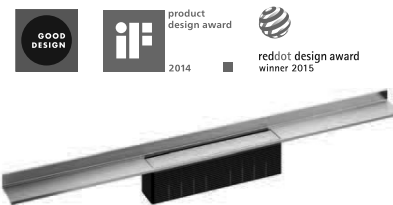

shower channel CeraWall Select  
satin stainless steel

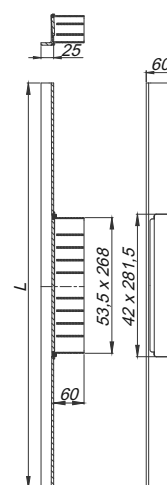

shower channel CeraWall Select  
polished stainless steel

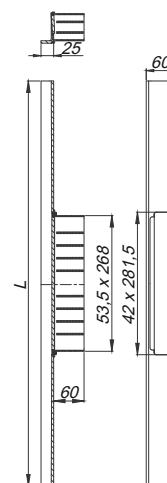

## DALLMER shower channel CeraWall Select polished stainless steel

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. With drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan suitable for floor finish of 10 – 24 mm and wall finish of 12 – 24 mm (including adhesive).

### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- construction and sealing adhesive
- temporary blanking plate with integral spirit level

### MATERIAL

1.4301 stainless steel, 5 mm solid, mirror polished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select polished stainless steel	800 mm	535252
shower channel CeraWall Select polished stainless steel	900 mm	535108
shower channel CeraWall Select polished stainless steel	1000 mm	535115
shower channel CeraWall Select polished stainless steel	1100 mm	535122
shower channel CeraWall Select polished stainless steel	1200 mm	535139
shower channel CeraWall Select polished stainless steel	1300 mm	536419
shower channel CeraWall Select polished stainless steel	1400 mm	536426
shower channel CeraWall Select polished stainless steel	1500 mm	536433

Ordering CeraWall Select:

Please order drain body DallFlex or shower underlay DallFlex Wall + shower channel CeraWall Select as two components.

# Shower channel CeraWall Select

## DALLMER shower channel CeraWall Select anthracite matt

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. With drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan suitable for floor finish of 10 – 24 mm and wall finish of 12 – 24 mm (including adhesive).

### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- construction and sealing adhesive
- temporary blanking plate with integral spirit level


### MATERIAL

1.4301 stainless steel, 5 mm solid, load class K 3 (300 kg), PVD coating in anthracite matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Select anthracite matt	800 mm	535283
shower channel CeraWall Select anthracite matt	900 mm	535306
shower channel CeraWall Select anthracite matt	1000 mm	535313
shower channel CeraWall Select anthracite matt	1100 mm	535320
shower channel CeraWall Select anthracite matt	1200 mm	535337



shower channel CeraWall Select anthracite matt

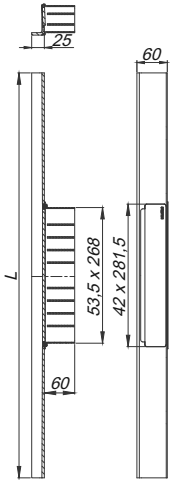

## DALLMER shower channel CeraWall Select red gold matt

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. With drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan suitable for floor finish of 10 – 24 mm and wall finish of 12 – 24 mm (including adhesive).


### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- construction and sealing adhesive
- temporary blanking plate with integral spirit level


### MATERIAL

1.4301 stainless steel, 5 mm solid, load class K 3 (300 kg), PVD coating in red gold matt

ITEM	LENGTH	PART NO.
shower channel CeraWall Select red gold matt	800 mm	535344
shower channel CeraWall Select red gold matt	900 mm	535351
shower channel CeraWall Select red gold matt	1000 mm	535368
shower channel CeraWall Select red gold matt	1100 mm	535375
shower channel CeraWall Select red gold matt	1200 mm	535382

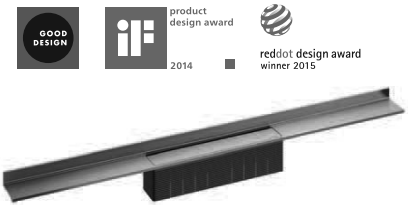

shower channel CeraWall Select red gold matt

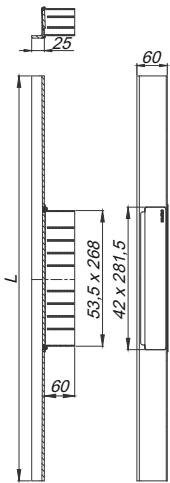

Ordering CeraWall Select:  
Please order drain body DallFlex or shower underlay DallFlex Wall + shower channel CeraWall Select as two components.

# Shower channel CeraWall Select

## DALLMER shower channel CeraWall Select brass matt

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan. Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. With drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan suitable for floor finish of 10 – 24 mm and wall finish of 12 – 24 mm (including adhesive).

### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- construction and sealing adhesive
- temporary blanking plate with integral spirit level

### MATERIAL

1.4301 stainless steel, 5 mm solid, load class K 3 (300 kg), PVD coating in brass matt


ITEM	LENGTH	PART NO.
shower channel CeraWall Select brass matt	800 mm	535399
shower channel CeraWall Select brass matt	900 mm	535405
shower channel CeraWall Select brass matt	1000 mm	535412
shower channel CeraWall Select brass matt	1100 mm	535429
shower channel CeraWall Select brass matt	1200 mm	535436

Ordering CeraWall Select:

Please order drain body DallFlex or shower underlay DallFlex Wall + shower channel CeraWall Select as two components.



shower channel CeraWall Select brass matt

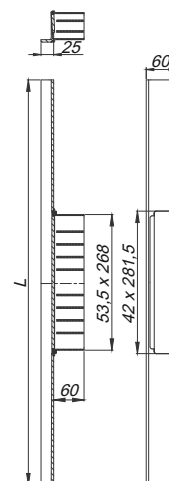

# Shower channel CeraWall Select N (natural stone)

## DALLMER shower channel CeraWall Select N satin stainless steel

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan.

Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for natural stone floor and wall finish 24 to 32 mm (including adhesive).


### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate with integral spirit level


### MATERIAL

1.4301 stainless steel, 6 mm solid, satin finished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select N satin stainless steel	800 mm	536730
shower channel CeraWall Select N satin stainless steel	900 mm	536747
shower channel CeraWall Select N satin stainless steel	1000 mm	536754
shower channel CeraWall Select N satin stainless steel	1100 mm	536761
shower channel CeraWall Select N satin stainless steel	1200 mm	536778
shower channel CeraWall Select N satin stainless steel	1300 mm	536785
shower channel CeraWall Select N satin stainless steel	1400 mm	536792
shower channel CeraWall Select N satin stainless steel	1500 mm	536808



shower channel CeraWall Select N  
satin stainless steel

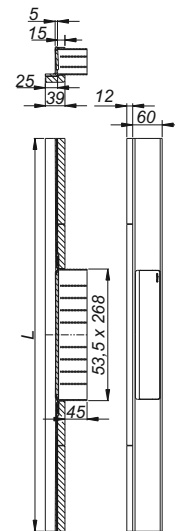

## DALLMER shower channel CeraWall Select N polished stainless steel

for installation with drain body DallFlex, DallFlex Plan, DallFlex vertical and shower underlay DallFlex Wall, DallFlex Wall Plan.

Drainage-strip with engineered precision fall, visibly installed at the junction of wall and floor. Suitable for natural stone floor and wall finish 24 to 32 mm (including adhesive).


### SPECIFICATION

- cover plate
- self-adhesive security tape S 3 with cut-resistant stainless steel mesh and sound insulation
- accessories for installation and positioning
- temporary blanking plate with integral spirit level


### MATERIAL

1.4301 stainless steel, 5 mm solid, mirror polished, load class K 3 (300 kg)

ITEM	LENGTH	PART NO.
shower channel CeraWall Select N polished stainless steel	800 mm	536570
shower channel CeraWall Select N polished stainless steel	900 mm	536587
shower channel CeraWall Select N polished stainless steel	1000 mm	536594
shower channel CeraWall Select N polished stainless steel	1100 mm	536600
shower channel CeraWall Select N polished stainless steel	1200 mm	536617
shower channel CeraWall Select N polished stainless steel	1300 mm	536624
shower channel CeraWall Select N polished stainless steel	1400 mm	536631
shower channel CeraWall Select N polished stainless steel	1500 mm	536648



shower channel CeraWall Select N  
polished stainless steel

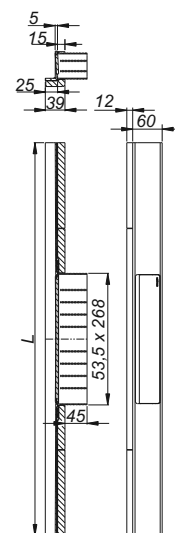

Ordering CeraWall Select:

Please order drain body DallFlex or shower underlay DallFlex Wall + shower channel CeraWall Select N as two components.