

DallFlex **drain body** – the original that sets the benchmark

*The DallFlex system. One drain body,
seven shower channels*

PURE



Floor and wall shower channels:



CeraFloor Select




CeraWall Select



CeraWall Individual



CeraFloor Pure

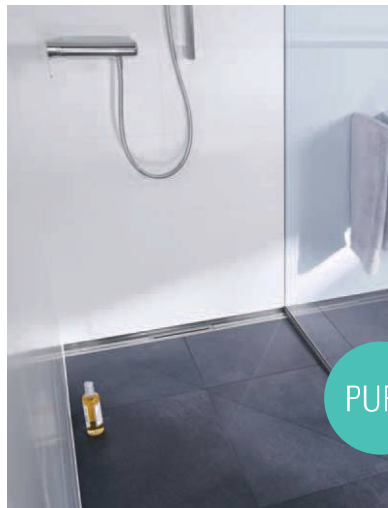

CeraWall Pure

Compact shower channels:



Zentrix



CeraNiveau

Drain body DallFlex



DALLMER drain body DallFlex Plan

for installation with shower channels CeraFloor, CeraWall, Zentrix and CeraNiveau.
Outlet DN 40 horizontal, can be positioned on three sides without tools,
with ball-joint, adjustable 0 – 15 degrees

SPECIFICATION

- integrated anchors for extra grip in the screed
- flexible sealing collar for secure bonding of under-tile waterproofing
- accessories for sound insulated installation
- sound absorbing and height adjustable levelling legs
- removable trap insert with 30 mm water seal
- temporary blanking plate

MATERIAL

drain body polypropylene

outlet polyethylene

FLOW RATE TESTED TO DIN EN 1253 TAB. 3,
(with 20 mm water over cover plate) conforming to DIN EN 274


	Required	Dallmer
DN 40	0.4 l/s	0.5 l/s

ITEM	DN	PART NO.
drain body DallFlex Plan	DN 40	539014

Build-in height 65 mm




drain body DallFlex Plan

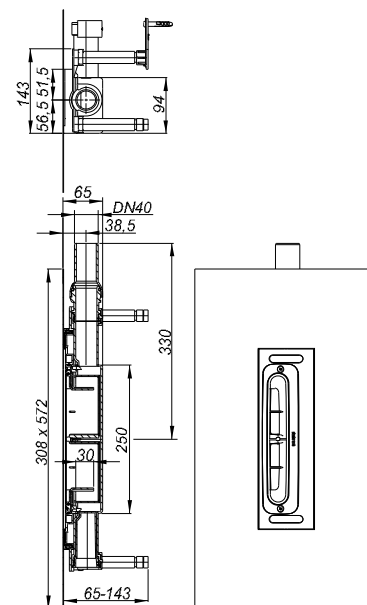

DALLMER sound-insulating element DallFlex Plan

for use with drain body DallFlex Plan and shower channels CeraFloor Select or CeraWall.
Tested to conform to DIN 4109/VDI 4100, certificate P-BA 142/2015 (CeraFloor Select and CeraWall Individual) and P BA 144/2015 (CeraWall Select).

ITEM	PART NO.
sound-insulating element DallFlex Plan	539106

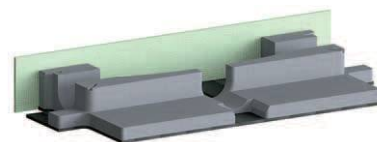

sound-insulating element DallFlex Plan

